


# Standard Rectifier Module

|                         |          |
|-------------------------|----------|
| <b>3~<br/>Rectifier</b> |          |
| $V_{RRM}$               | = 1600 V |
| $I_{DAV}$               | = 35 A   |
| $I_{FSM}$               | = 400 A  |

## 3~ Rectifier Bridge

Part number

**VUO35-16N07**

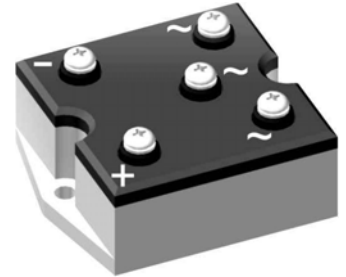

E72873



### Features / Advantages:

- Package with DCB ceramic
- Improved temperature and power cycling
- Planar passivated chips
- Very low forward voltage drop
- Very low leakage current

### Applications:


- Diode for main rectification
- For three phase bridge configurations
- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

### Package: PWS-A

- Industry standard outline
- RoHS compliant
- Easy to mount with two screws
- Base plate: Aluminium internally DCB isolated
- Advanced power cycling

| Rectifier  |  |   |                                | Ratings |      |                  |
|------------|--|---|--------------------------------|---------|------|------------------|
| Symbol     | Definition                                   | Conditions  | min.                           | typ.    | max. | Unit             |
| $V_{RSM}$  | max. non-repetitive reverse blocking voltage | $T_{VJ} = 25^{\circ}\text{C}$                               |                                |         | 1700 | V                |
| $V_{RRM}$  | max. repetitive reverse blocking voltage     | $T_{VJ} = 25^{\circ}\text{C}$                               |                                |         | 1600 | V                |
| $I_R$      | reverse current                              | $V_R = 1600\text{ V}$                                       | $T_{VJ} = 25^{\circ}\text{C}$  |         | 40   | $\mu\text{A}$    |
|            |  | $V_R = 1600\text{ V}$                                       | $T_{VJ} = 150^{\circ}\text{C}$ |         | 1.5  | mA               |
| $V_F$      | forward voltage drop                         | $I_F = 15\text{ A}$   | $T_{VJ} = 25^{\circ}\text{C}$  |         | 1.10 | V                |
|            |  | $I_F = 45\text{ A}$   |                                |         | 1.38 | V                |
|            |  | $I_F = 15\text{ A}$   | $T_{VJ} = 125^{\circ}\text{C}$ |         | 1.01 | V                |
|            |  | $I_F = 45\text{ A}$   |                                |         | 1.38 | V                |
| $I_{DAV}$  | bridge output current                        | $T_C = 85^{\circ}\text{C}$<br>rectangular $d = \frac{1}{3}$ | $T_{VJ} = 150^{\circ}\text{C}$ |         | 35   | A                |
| $V_{FO}$   | threshold voltage                            | } for power loss calculation only                           | $T_{VJ} = 150^{\circ}\text{C}$ |         | 0.80 | V                |
| $r_F$      | slope resistance                             |   |                                |         | 12.9 | m $\Omega$       |
| $R_{thJC}$ | thermal resistance junction to case          |   |                                |         | 4.2  | K/W              |
| $R_{thCH}$ | thermal resistance case to heatsink          |   |                                | 0.6     |      | K/W              |
| $P_{tot}$  | total power dissipation                      |   | $T_C = 25^{\circ}\text{C}$     |         | 29   | W                |
| $I_{FSM}$  | max. forward surge current                   | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$            | $T_{VJ} = 45^{\circ}\text{C}$  |         | 400  | A                |
|            |  | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$           | $V_R = 0\text{ V}$             |         | 430  | A                |
|            |  | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$            | $T_{VJ} = 150^{\circ}\text{C}$ |         | 340  | A                |
|            |  | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$           | $V_R = 0\text{ V}$             |         | 365  | A                |
| $I^2t$     | value for fusing                             | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$            | $T_{VJ} = 45^{\circ}\text{C}$  |         | 800  | A <sup>2</sup> s |
|            |  | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$           | $V_R = 0\text{ V}$             |         | 770  | A <sup>2</sup> s |
|            |  | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$            | $T_{VJ} = 150^{\circ}\text{C}$ |         | 580  | A <sup>2</sup> s |
|            |  | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$           | $V_R = 0\text{ V}$             |         | 555  | A <sup>2</sup> s |
| $C_J$      | junction capacitance                         | $V_R = 400\text{ V}; f = 1\text{ MHz}$                      | $T_{VJ} = 25^{\circ}\text{C}$  |         | 10   | pF               |

| Package PWS-A |  |                      | Ratings |      |      |      |
|---------------|--|----------------------|---------|------|------|------|
| Symbol        | Definition   | Conditions           | min.    | typ. | max. | Unit |
| $I_{RMS}$     | RMS current  | per terminal         |         |      | 100  | A    |
| $T_{stg}$     | storage temperature  |                      | -40     |      | 125  | °C   |
| $T_{VJ}$      | virtual junction temperature                                 |                      | -40     |      | 150  | °C   |
| <b>Weight</b> |  |                      |         | 100  |      | g    |
| $M_D$         | mounting torque  |                      | 1.25    |      | 1.75 | Nm   |
| $M_T$         | terminal torque  |                      | 1.25    |      | 1.75 | Nm   |
| $d_{Spp/App}$ | creepage distance on surface   striking distance through air | terminal to terminal | 6.5     |      |      | mm   |
| $d_{Spt/Apb}$ |  | terminal to backside | 8.5     |      |      | mm   |
| $V_{ISOL}$    | isolation voltage  | t = 1 second         | 3000    |      |      | V    |
|               |  | t = 1 minute         | 2500    |      |      | V    |



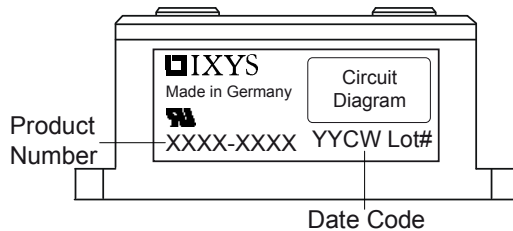


| Ordering | Part Number | Marking on Product | Delivery Mode | Quantity | Code No. |
|----------|-------------|--------------------|---------------|----------|----------|
| Standard | VUO35-16NO7 | VUO35-16NO7        | Box           | 20       | 456659   |

### Equivalent Circuits for Simulation \* on die level $T_{VJ} = 150^\circ\text{C}$

| Symbol | Definition         | Value | Unit |
|--------|--------------------|-------|------|
| $V_0$  | threshold voltage  | 0.8   | V    |
| $R_0$  | slope resistance * | 11.7  | mΩ   |

**Outlines PWS-A**

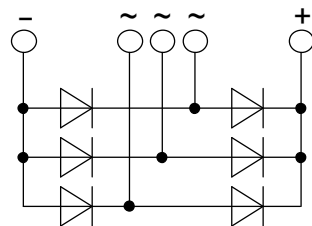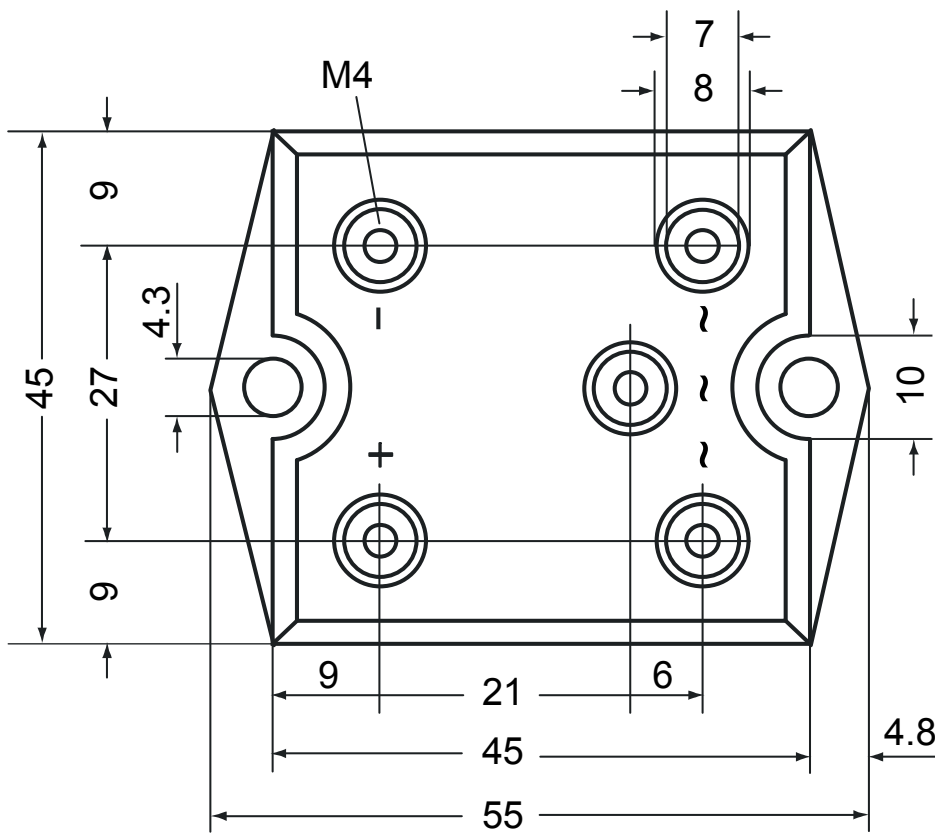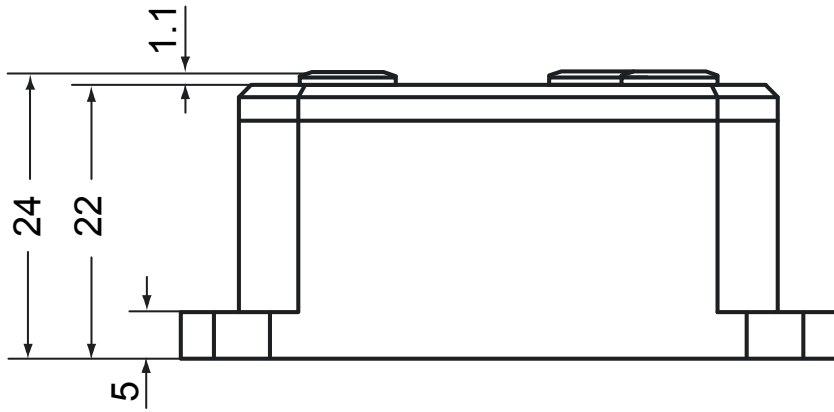

## Rectifier

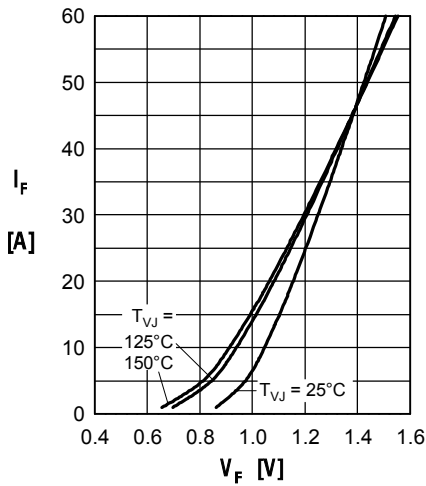


Fig. 1 Forward current vs. voltage drop per diode

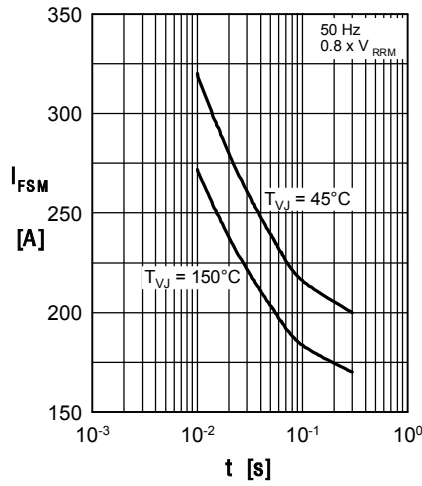


Fig. 2 Surge overload current vs. time per diode

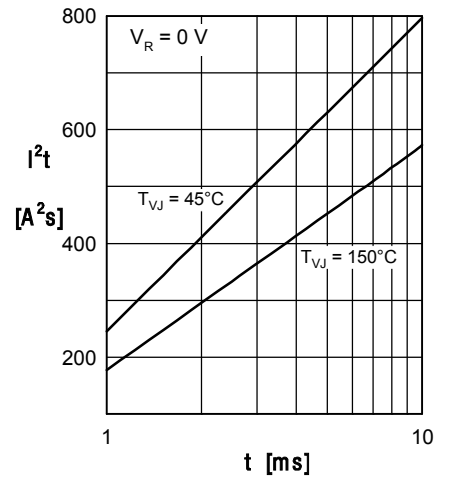


Fig. 3  $I^2t$  vs. time per diode

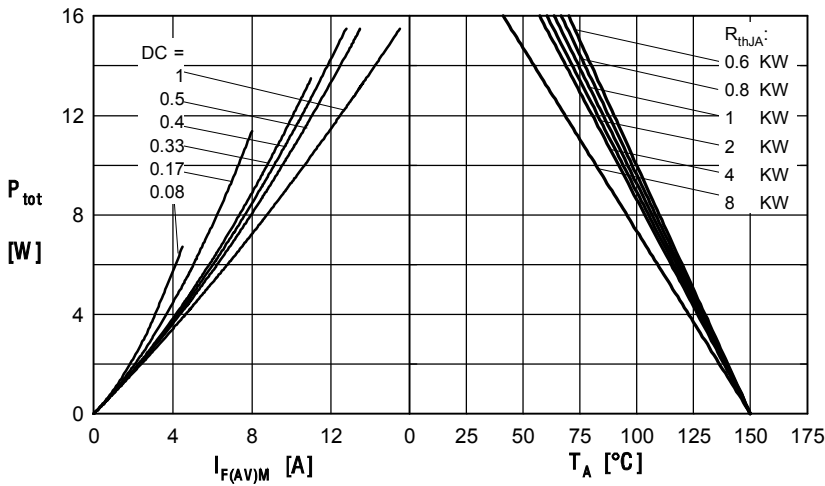


Fig. 4 Power dissipation vs. forward current and ambient temperature per diode

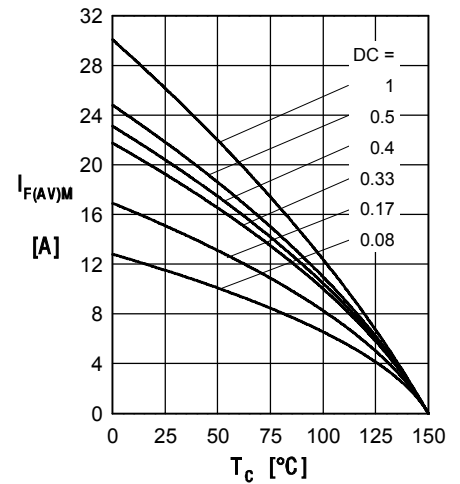


Fig. 5 Max. forward current vs. case temperature per diode

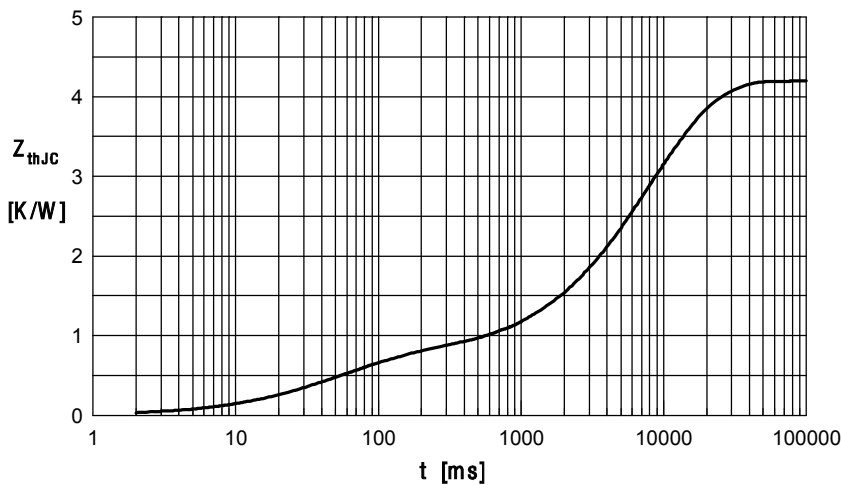


Fig. 6 Transient thermal impedance junction to case vs. time per diode

Constants for  $Z_{thJC}$  calculation:

| i | $R_{th}$ (K/W) | $t_i$ (s) |
|---|----------------|-----------|
| 1 | 0.194          | 0.024     |
| 2 | 0.556          | 0.070     |
| 3 | 0.450          | 3.250     |
| 4 | 3.000          | 9.300     |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[VUO35-16NO7](#)